

PS-101R Garage Remote Controller

101R is a remote control for electric roller shutter of garages or shops. It can control the shutter rolling up, rolling down and stop by pressing the handheld


- Power Input: AC 220V
- Effective Distance: 100M (open space)
- Frequency: 305MHZ(RF)
- Code combination: 8-Bits(codes can be programmed by yourself)
- Transmitter power source: DC 12V Alkaline Battery (A23)
- 4-button for transmitter: UP, STOP/ON, DOWN, OFF
- By pressing STOP/ON & OFF button of transmitter, remote control to turn ON & OFF of power supply of motor or house appliance.
- One set includes one receiver and two transmitters
- Additional transmitter model : PS-101P
- Maximum number of transmitter: Unlimited
- Dimension:

Receiver: 183W x 108L x 38Dmm


Transmitter: 37W x 58L x 15Dmm



remote controller.

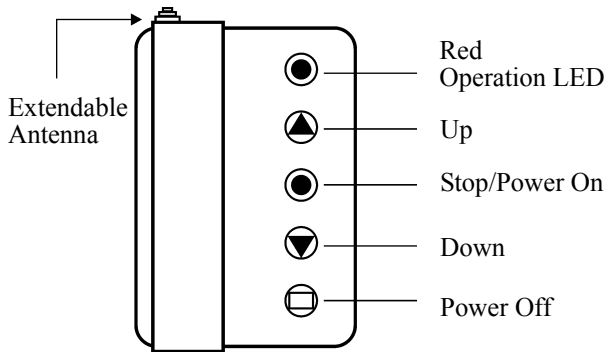

Wiring Diagram:

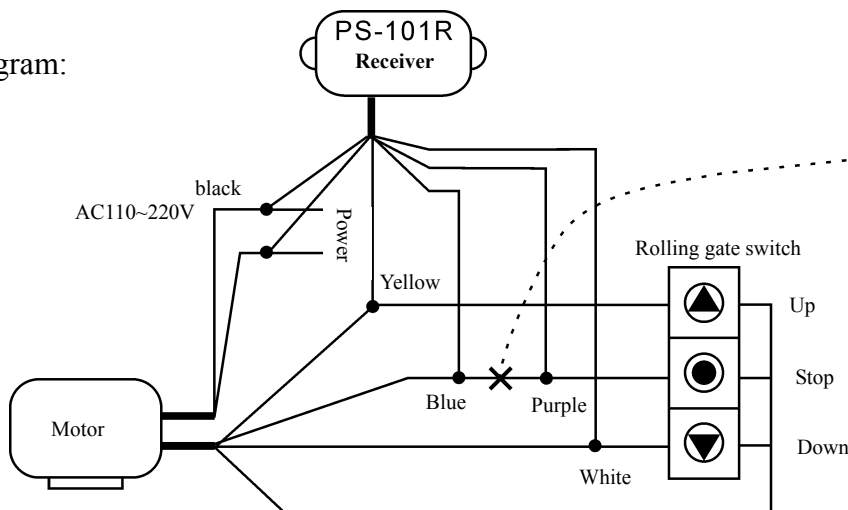

Cut the wire of the Stop rolling gate switch when you connect this remote. The wire-end closes to the motor is connected to the blue wire; the wire-end closes to the rolling gate switch is connected to the purple wire.